


Blood Bank Refrigerator($4\pm 1^{\circ}\text{C}$)

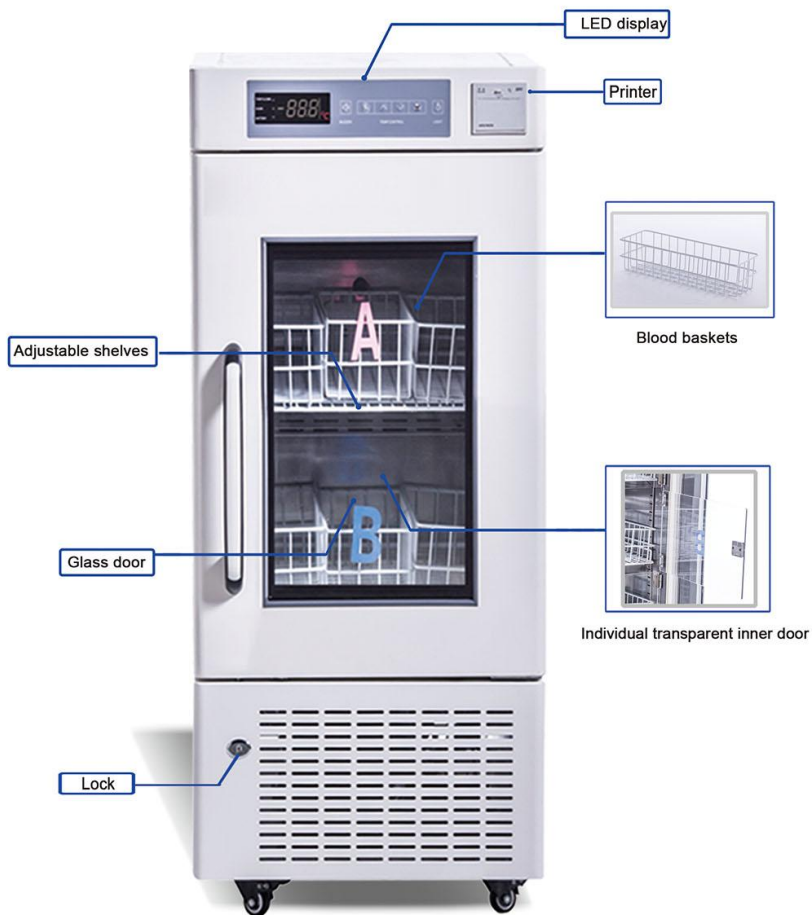

Blood Bank Refrigerator

Advantage

1. Multiple sensors design: make sure the precise monitoring and programming.
2. Double layer transparent glass door, easy to observe, also keep a better cooling temperature.
3. Forced air refrigeration system, ensure inner temperature constant and uniform.
4. Adjustable shelves, improve space utilization; blood storage baskets can be classified.
5. Individual transparent inner door, effectively reduce cool air loss when opening the door.



120L



160L



210L



250L




310L

Technical Parameters

Model	BBR-4V120	BBR-4V160	BBR-4V210	BBR-4V250	BBR-4V310
Capacity	120L	160L	210L	250L	310L
Temp. Range	4±1℃				
Temp. Accuracy	0.1℃				
Control System	Microprocessor control				
Display	LED display				
Alarm	Audio and visual alarm for: High or low temperature, Sensor & system failure; Door ajar; Power failure, Low battery alarm for BBR-4V120/210; Battery off alarm for BBR-4V160/250/310				
Refrigeration Type	Forced air refrigeration system				
Refrigerant	R134a, CFC-Free				
Compressor	International famous compressor				
Condenser & Evaporator	High efficiency air-cooled condenser, made of copper				
Defrost	Auto defrost				
Construction	Unibody Design, Mono-assembly foaming (Rigid polyurethane insulation material)				
Material	Internal Material	Stainless steel			
	External Material	Cold-rolled steel with anti-bacteria powder coating			
Door	Double layer transparent glass door with lock, Heating film preventing frosting, Sealing joint strip with magnetic force. Transparent plastic inner door				
Consumption	160W	257W	200W	380W	380W
Power Supply	AC110V/220V±10%, 50/60Hz				
Casters	4 casters				
Adjustable Shelves	2pcs	4pcs	4pcs	4pcs	5pcs
Baskets	6pcs	12pcs	12pcs	12pcs	15pcs
Blood Bags (450ml)	66pcs	120pcs	132pcs	156pcs	195pcs
Standard Accessory	Temperature printer, LED lamp, probe access port, door key				
Optional Accessory	Temperature recorder				
External Size(W*D*H) mm	522*635*1030	530*593*1287	522*635*1530	630*666*1658	630*666*1886
Package Size(W*D*H)mm	580*690*1200	672*732*1501	580*690*1700	762*812*1866	762*812*2091
Gross Weight	95kg	104kg	120kg	145kg	167kg

Blood Bank Refrigerator

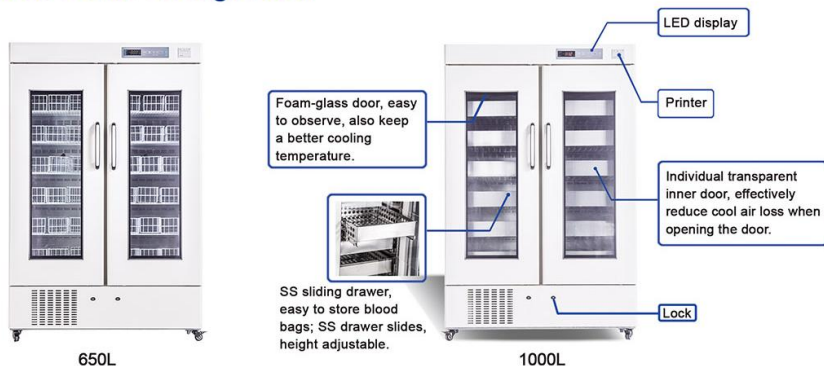

Technical Parameters

Model	BBR-4V650	BBR-4V1000
Capacity	650L	1000L
Temp. Range	4±1°C	
Temp. Accuracy	0.1°C	
Control System	Microprocessor control	
Display	LED display	
Alarm	Audio and visual alarm for: High or low temperature, Sensor & system failure; Door ajar, Power failure, Low battery	
Refrigeration Type	Forced air refrigeration system	
Refrigerant	R134a, CFC-Free	
Defrost	Auto defrost	
Construction	Unibody Design, Mono-assembly foaming (Rigid polyurethane insulation material)	
Material	Internal Material	Stainless steel
	External Material	Cold-rolled steel with anti-bacteria powder coating
Door	Double layer transparent glass door with lock, Heating film preventing frosting, Sealing joint strip with magnetic force. Transparent plastic inner door	
Drawers/Shelves	Adjustable shelves	SS drawers
Casters	4 casters	4 casters
Consumption	364W	513W
Power Supply	AC110V/220V±10%, 50/60Hz	
Blood Bags (450ml)	360 pcs	576 pcs
Standard Accessory	Temperature printer, 12 shelves, 36 baskets, LED lamp, probe access port, door key	Temperature printer, 12 drawers, LED lamp, probe access port, door key
Optional Accessory	Temperature recorder	
External Size(W*D*H) mm	1220*648*1885	1220*878*1885
Package Size(W*D*H) mm	1300*735*2110	1300*960*2130
Gross Weight	257kg	335kg